# Induction Cooktop

Stainless Steel
KICU500XSS

Image may not represent final product.

## Advanced Cooking Technology

Induction technology uses electromagnetic energy to generate instant heat directly to the cookware. This provides faster heating and cooling times while allowing almost all of the source energy to transfer to the cookware for extreme efficiency.

## Unsurpassed Responsiveness

Go from a simmer to a boil in seconds and maintain the integrity of whatever you're cooking. Induction elements respond immediately to heat-level setting changes, so you can simmer, sear, and sauté with precision.

## Performance Boost Function

All elements feature a performance boost function which allows you to quickly bring liquids to a rolling boil by increasing the heat-level setting above 9 for up to 10 minutes.

Preliminary

## Architect® Series II
## KICU500X – 30-Inch

### Performance

- 4 Elements
- Induction Technology
- 10" 3200-Watt Element
- 9" 3200-Watt Element
- 7" 2500-Watt Element
- 6" 1800-Watt Element
- Performance Boost Function
- Simmer Function
- Melt & Hold Function
- Touch-Activated Cooktop Controls
- Pan Size Detection
- 9 Heat-Level Settings
- Timer
- Pause Function
- Cooktop Power Off Function
- Hot-Surface Indicator
- Control Lock Function

### Craftsmanship & Design

- Premium Ceramic-Glass Surface
- Frameless Design (KICU500XBL)
- Stainless Steel Trim (KICU500XSS)

### Colors

- Black (BL), Stainless Steel (SS)

KitchenAid®

FOR THE WAY IT'S MADE.®

# Induction Cooktop

## KICU500X

Preliminary

### PRODUCT DIMENSIONS

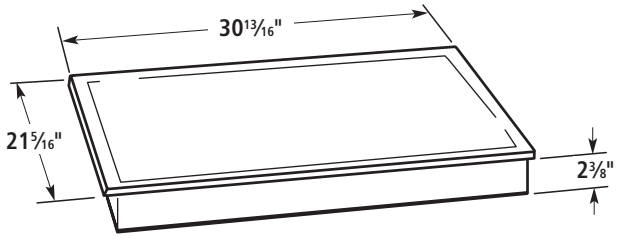


### CUTOUT DIMENSIONS

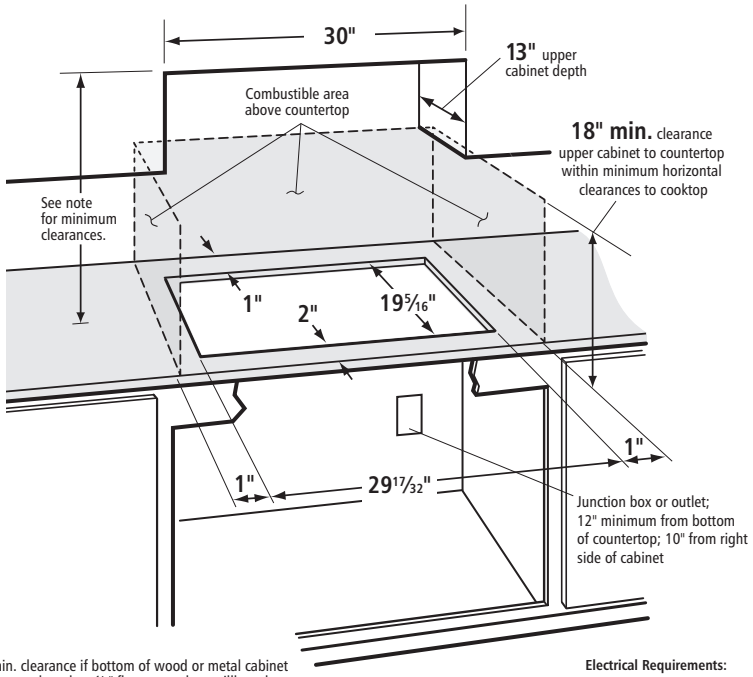
30"
13" upper cabinet depth
Combustible area above countertop
18" min. clearance upper cabinet to countertop within minimum horizontal clearances to cooktop
See note for minimum clearances.
1"
2"
19 5/16"
1"
1"
29 17/32"
Junction box or outlet; 12" minimum from bottom of countertop; 10" from right side of cabinet

**NOTE**: 24" min. clearance if bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum, or 0.020" copper.

30" min. clearance between top of cooktop platform and bottom of unprotected wood or metal cabinet.

If installing a hood above the cooktop, follow hood instructions for dimensional clearances above the cooktop surface.

**Electrical Requirements:**
A 4-wire or 3-wire, single phase, 240 volt, 60 Hz., AC only electrical supply is required on a separate, 40-amp circuit, fused on both sides of the line.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

For additional information about KitchenAid® appliances, visit KitchenAid.com or call the Customer Experience Center at 800-422-1230. We'll help you select the ideal model and answer questions about appliance operation and performance.

KitchenAid®
FOR THE WAY IT'S MADE.®

®Registered trademark/™Trademark/the shape of the stand mixer is a registered trademark of KitchenAid, U.S.A.
©2010. All rights reserved.